


Fine Braids

Plaited Polyester Cord



FEATURES/ BENEFITS

- Multi-purpose, textured feel 8 plait braid
- High abrasion resistant properties make it ideal for blinds
- UV stabilised
- Excellent knotting and untying properties
- Available in 3mm, 5mm, 6mm, 8mm, 10mm & 12mm diameters
- Black VB cord available in 3mm x 500m
- Also available in a variety of colours upon request

APPLICATIONS

- Blind draw cords (Venetians, Roman)
- Light tarpaulin

Smooth Polyester Cord




FEATURES/ BENEFITS

- 16 plait smooth braid, soft handling
- Highly resistant to stretch and abrasion
- UV stabilised
- Excellent knotting and untying properties
- Available in 2mm, 2.5mm, 3mm, 4mm & 5mm diameters

APPLICATIONS

- Whipping Cord
- Tarpaulins
- Tying Lashing
- Flag poles
- Lacing Cord

Polyester Starter Cord

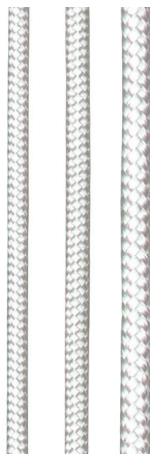


FEATURES/ BENEFITS

- Strong, durable, low stretch, high tenacity cord
- Maximum abrasion resistance
- Can be pulled quickly without kinks, rotations or twists
- UV stabilised
- Stable shape and wide surface area, runs freely through eyelets
- Available in 3.5mm, 4mm, 4.5mm & 5mm diameters to suit all leading equipment starter mechanisms

APPLICATIONS

- Starter motors
- Tarpaulins
- Combustion engines
- Heavier blinds



RANGE/TECHNICAL

| Product Code | Description | Weight Kg | Breaking Kn | Force Kg | UOM |
|---|--|-----------|-------------|----------|------|
| 16 PLAIT SMOOTH POLYESTER CORD NATURAL | | | | | |
| RBRS0208 | Synthetic Braid 2mm x 100m | 0.4 | 1.0 | 110 | Reel |
| RBRS0210M* | Synthetic Braid 2mm x 300m | 1.1 | 1.0 | 110 | Reel |
| RBRS0214 | Synthetic Braid 2.5mm x 100m | 0.7 | 1.4 | 150 | Reel |
| RBRS0258M* | Synthetic Braid 2.5mm x 300m | 2.1 | 1.4 | 150 | Reel |
| RBRS0312 | Synthetic Braid 3mm x 100m | 0.8 | 2.1 | 220 | Reel |
| RBRS0313M | Synthetic Braid 3mm x 300m | 2.4 | 2.1 | 220 | Reel |
| RBRS0410 | Synthetic Braid 4mm x 100m | 1.7 | 3.4 | 350 | Reel |
| RBRS0411M | Synthetic Braid 4mm x 300m | 4.9 | 3.4 | 350 | Reel |
| RBRS0505 | Synthetic Braid 5mm x 100m | 2.1 | 5.0 | 520 | Reel |
| 8 PLAIT TEXTURED POLYESTER CORD NATURAL | | | | | |
| RBRO0318 | Polyester VB Cord 3mm x 500m Black | 3.7 | 1.9 | 200 | Reel |
| RBRS0331 | Synthetic Braid Textured 3mm x 500m White | 3.2 | 2.1 | 220 | Reel |
| RBRS0504* | Synthetic Braid Textured 5mm x 250m White | 8.2 | 5.0 | 520 | Reel |
| RBRS0606* | Synthetic Braid Textured 6mm x 250m White | 3.7 | 5.8 | 600 | Reel |
| RBRS0880 | Synthetic Braid Textured 8mm x 200m White | 9.5 | 11.2 | 1150 | Reel |
| RBRS1005* | Synthetic Braid Textured 10mm x 250m White | 10.7 | 15.6 | 1600 | Reel |
| RBRS1209* | Synthetic Braid Textured 12mm x 80m White | 9.0 | 21.5 | 2200 | Reel |
| 16 PLAIT SMOOTH POLYESTER STARTER CORD NATURAL | | | | | |
| RBRS0352 | Synthetic Start Cord 3.5mm x 100m R3161 | 1.2 | 2.3 | 240 | Reel |
| RBRS0417 | Synthetic Start Cord 4mm x 100m R3026 | 1.7 | 2.9 | 300 | Reel |
| RBRS0449 | Synthetic Start Cord 4.5mm x 100m | 1.9 | 4.1 | 420 | Reel |
| RBRS0509 | Synthetic Start Cord 5mm x 100m R3240 | 2.7 | 4.9 | 500 | Reel |

* Made to order - minimum order quantity and lead time applies

FIBRE CHARACTERISTICS

| Fibre type | Description | Specific gravity | Sensitive to | Resistant to | Heat reaction | Strength and elongation |
|------------------|---------------------|------------------|---|--|-----------------------------|--|
| Polyester | Continuous Filament | 1.38 | Alkalis, Phenolic Compounds, Sulfuric Acid. | Most Organic and Mineral Acids, Solvents, Bleaches and Oxidizing Agents. | Softens 228°C, Melts 255°C. | Equivalent wet/ dry strength ratio. Elongation 12% at Break. |